



Round wall or ceiling luminaire for surface mounting, equipped with LED technology.

Housing is made of sheet steel, colour acc. to RAL 9016.

Soft ceiling illumination is made by a circumferential indirect light.

Light is distributed via an opal acrylic cover.


Electrical connection area on back side is slightly stepped (height: 22 mm).

| Type | Lumen Output | System Power | Dimension (Ø x h) |
|---------------------|--------------|--------------|-----------------------|
| FLAT C 300 1.5 OS | 1.760 Lumen | 15 Watt | 300 x 75 (53+22) mm |
| FLAT C 360 3.5 OS | 3.520 Lumen | 30 Watt | 360 x 75 (53+22) mm |
| FLAT C 470 4.0 OS | 4.210 Lumen | 36 Watt | 470 x 75 (53+22) mm |
| FLAT C 600 5.5 OS | 5.600 Lumen | 48 Watt | 600 x 75 (53+22) mm |
| FLAT C 900 8.0 OS | 8.460 Lumen | 57 Watt | 900 x 75 (53+22) mm |
| FLAT C 1200 12.0 OS | 12.180 Lumen | 84 Watt | 1.200 x 75 (53+22) mm |

Technical Data:

| | |
|-------------------|----------------------|
| Voltage: | 220-240 V / 50-60 Hz |
| Protection class: | 1 |
| Protection type: | IP20 |
| Ballast: | switchable |
| Cover: | opal |
| Colour: | RAL 9016 |
| Light colour: | 4.000K |
| Colour Rendering: | RA>80 |

Dimension Drawing:

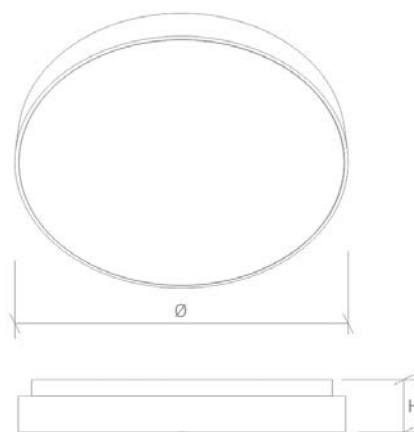

Options:

- Ballast DALI dimmable
- Housing acc. to RAL card
- Light colour 3.000K
- Microprismatic cover (product BWF)
- Microprismatic cover UGR<19, (product Jungbecker)