



Subject to technical changes also without notification. This document is the intellectual property of ourselves. Without our approval, it may not be either reproduced or commercialised, distributed or presented to other individuals for commercial purposes without authorisation to do so.



LED warning light for installation into all our wall systems.

Cover of with a optiwhite toughened safetyglass with multiple layer digital printing. In illuminated state the chosen warning notice (see also ordering option a) is extra intensively highlighted by the use of red LED's. In the non-illuminated state only the basic colour of the glass is visible (see ordering option b)

Mounting of the luminaire with retaining knob.

Type	Lighting system	Approx. size L x W x H*
RWL 255 LED <u>a</u> <u>b</u> <u>c</u> - <u>d</u>	LED red, approx. 5W	255x130x23mm *zzgl. Kabelanschluss + Treiber

Technical Data:

Voltage: 220-240 V / 50-60 Hz
 Protection class: 3, driver protection class 2
 Protection rating: IP20
 Control unit: switchable
 Elec. connection: 2-pin. plug on external driver
 Colour: RAL 9016
 Glass: toughened safety glass with print


Ordering options:

- a: X-RAYS or LASER
- b: Glass colour white (weiß) or black (schw)
- c: german (de) or english (en)
- d: Print inside (i) or outside (a)

Exampel:

Luminaire with X-RAYS warning notice, colour white, language german with inside print (as picture)

Scale diagram:

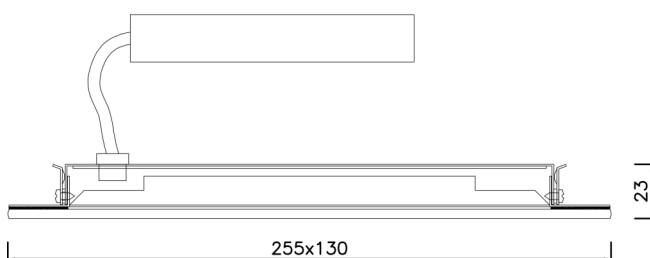

RWL 255 LED X-RAYS weiß en-i

