



Linear luminaire for surface mounting, equipped with LED technology.

Housing is made of sheet steel, colour acc. to RAL 9016.


Light is distributed via a half-round opal acrylic cover. The cover can be removed without additional tools (clip-in system).

Type	Lumen Output	System Power	Dimension (l x w x h)
LB 35 600 1.0 OS	1.000 Lumen	9 Watt	600 x 35 x 58 mm
LB 35 1200 2.0 OS	2.000 Lumen	18 Watt	1.200 x 35 x 58 mm

Technical Data:

Voltage: 220-240 V / 50-60 Hz
 Protection class: 1
 Protection type: IP20
 Ballast: switchable
 Cover: opal
 Colour: RAL 9016
 Light colour: 4.000K
 Colour Rendering: RA>80

Dimension Drawing:

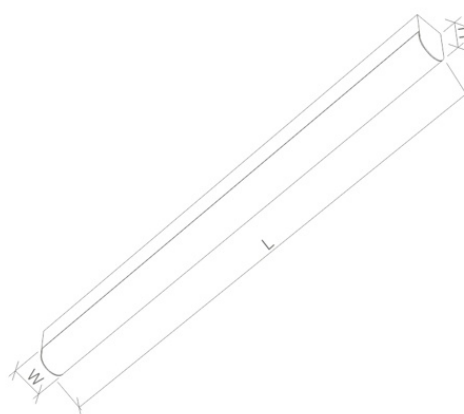

Options:

Ballast DALI dimmable
 Light colour 3.000K

Subject to change without notice. This data sheet is our property. Submitting to third parties or changes are not allowed.