

Light ceiling module, equipped with LED technology.

Housing is made of sheet steel, colour acc. to RAL 9010.

Light is distributed via an optimised stretching film cover, inserted into the luminaire's frame (20 mm).


The luminaire can be produced project-related with different dimensions and light output.

Type	Lumen Output	System Power	Dimension (l x w x h)
LILI SKY 200 q1500 7.0 SF	7.000 Lumen	95 Watt	1.500 x 1.500 x 200 mm

Technical Information:

Voltage:	230-240 V / 50-60 Hz
Protection Class:	1
Protection Type:	IP 40
Ballast:	switchable
Cover:	stretch film
Colour:	RAL 9010
Light Colour:	4.000K
CRI:	RA>80

Dimension Drawing:

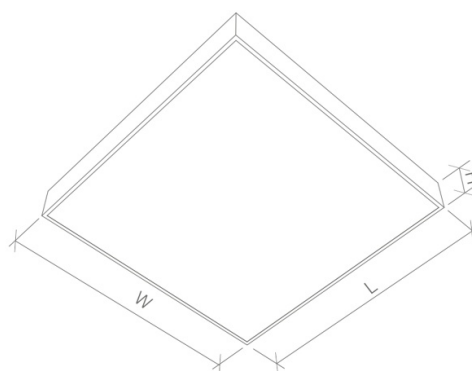

Options:

- Light Colour 3.000K
- Ballast DALI dimmable
- Housing acc. to RAL Card
- Tunable White
- RGB, RGB + W