




Teardrop luminaire with yellow light, equipped with LED technology.

Due to the opal cover in the shape of a teardrop, air turbulences can be avoided. A filter effect of wavelengths (<math><530\text{nm}</math> <math><1\%</math>) is achieved.

The two-sided coated diffusion layer enables the highest degree of efficiency.

The cover is mounted by stainless steel springs on the inside, without additional tools.

Delivery of single luminaires or delivery for formation of linear lighting strips are possible.

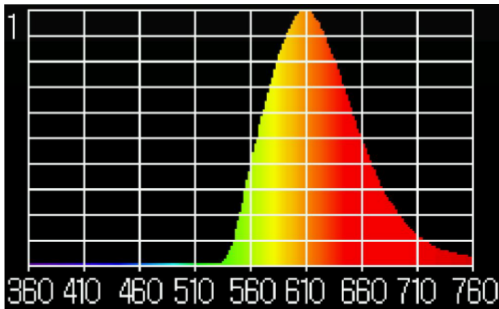


Type	Lighting system	Approx. size W x L x H
TD-L y9 640 0.5 OA	LED y9, 800 Lumen, 14 Watt	50 x 640 x 90 mm
TD-L y9 920 1.0 OA	LED y9, 1200 Lumen, 21 Watt	50 x 920 x 90 mm
TD-L y9 1200 1.5 OA	LED y9, 1600 Lumen, 28 Watt	50 x 1200 x 90 mm


Technical Data:

Voltage: 220-240 V / 50-60 Hz
 Protection class: 1
 Protection rating: IP40
 Control unit: switchable, optional DALI dimmer
 elec. connection: internal 3-pin plug (DALI 5-pin) with straight wiring option
 Colour: RAL 9016 / customer choice
 Enclosure: diffuse PMMA profile cover

Light distribution curve:



Scale diagram:

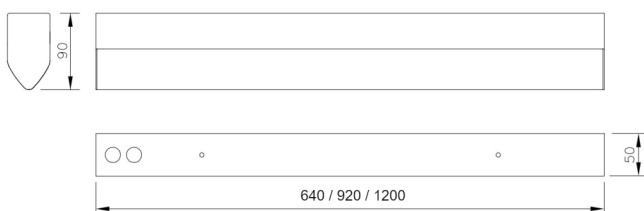

Options:

- emergency light
- IP54 (max. two length light-band possible)
- straight wiring
- elec. connection according to customer requirement