



NORTEC STONeline

Raised floor with stone


The raised access floor system NORTEC is the ideal product for nearly all applications with its excellent technical and building-physical characteristics. The raised access floor panels consist of fibre-reinforced calcium sulphate and are optionally applied with a steel sheet on the lower side. STONeline offers a range of natural and artificial stone and ceramic tiles, factory bonded to our NORTEC panels. The panels are protected against shock and humidity by an edge trim on all edges. The substructure consists of height-adjustable zinc-coated steel pedestals from our own production which form the necessary cavity for installations and gaskets for sound decoupling.

- Superb walking comfort
- Very high loadability
- Non-combustible
- Simple lifting and exchanging of single panels

Examples for areas of application

Work: Common Rooms, Facilities for Meetings, Conventions and Conferences, Office buildings

Public Areas: Escape Routes

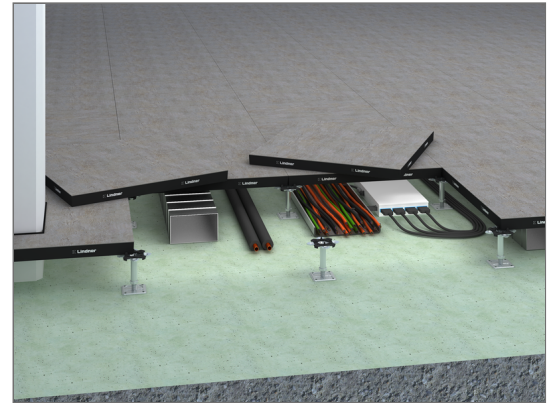

Technical details

Dimensions

Standard pedestal height		25 - 2000 mm
Pedestal Grid		600 mm x 600 mm
EN 12825	EN 12825	Class 1

Technical data

Earth resistance		$\geq 1 \times 10^6 \Omega$
------------------	--	-----------------------------

Static

Statics

EN 12825	EN 12825	2
Seismic safety		possible



Fire protection

Building material class

Building material class		of the carrier panel
Fire behavior	DIN EN 13501-1	A1
Reaction to fire performance	DIN 4102 1	A2
Designation by building authorities	DIN EN 13501-1	non-combustible
Designation by the building authorities	DIN 4102 1	non-combustible

Sustainability

Declarations

circular economy	Cradle to Cradle Certified® Silber
Product Self-Declaration	Self-Declaration according to ISO 14021
EPD (Environmental Product Declaration)	EPD according to EN 15804 / ISO 14025
FSC	optional (TUEV-COC-000515)
French VOC Regulation	Emission class A+

Coverings

Surfaces

Surfacing suitability	STONEline
-----------------------	-----------