



T0-1 Type S

Sliding door

Sliding door leaf, approx. 41 mm, 49 mm or 68 mm with laminated intermediate layer and strengtheners of oriented strand board, single door leaf without fire protection (Sound insulation, radiation protection, moisture resistance on demand).

Examples for areas of application


Work: Facilities for Meetings, Conventions and Conferences, Office buildings

Healthcare: Clinics and Hospitals, Laboratories and Research Facilities

Hotels and Gastronomy: Hotels and Resorts

Public Institutions: Court Houses, Government Buildings

Residential

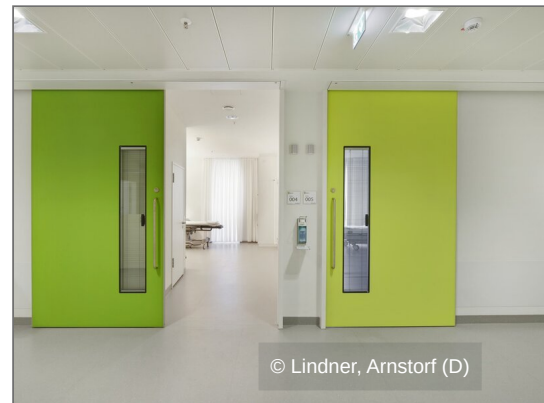

The mark of responsible forestry

Technical details

Technical data

DIN EN 12219	DIN EN 12219	2 3
mechanical stress		group E group S
Installation options		Lindner partition systems Drywall Solid walls
Edge design (door leaf)		Plastic edge band RAL-/NCS coated edge Solid wood edge band Solid wood inset edge band PU-edge
Frame type		Wooden enclosing frame Stahlzarge (ein-, zweiteilig)
Glazing		Circular glazing Friesbreite 135 mm



		Friesbreite min. 110 mm Special shapes
Number of leaves		single-leaf
Door leaf weight		26 - 44 kg/m ²
max. surface load		26 kg/m ²

Dimensions

Dimensions

Width (B)	750 - 1400 mm
Height	625 - 3000 mm
Door leaf thickness	approx. 41 mm approx. 49 mm approx. 68 mm

Acoustics

Building acoustics

DIN EN ISO 717 1 2	DIN EN ISO 717 2 abhängig Zusatzmaßnahmen	R _w	42 dB
--------------------	---	----------------	-------

Safety

Security

DIN 6834	DIN 6834 mmPb	lead equivalent value 2 mm Pb
----------	---------------	-------------------------------

Durability

Durability

Suitability for wet rooms	moisture resistant
Suitability for wet rooms	capable for wet rooms

Surfaces

Surfaces

Surfaces	Real wood veneer HPL-Schichtstoff RAL-/NCS-Nasslackierung bauseitiger Anstrich/Grundierfolie
----------	---



Sustainability

Declarations

Emission report	A report concerning VOC emissions of this product is available. Eurofins Product Testing A/S, an independent testing institute, performed the tests. The testing laboratory is ISO 17025 accredited and EN 16516 notified. For further information, please do not hesitate to contact us.
Sustainable forestry	Our products can be supplied FSC-certified (Chain of custody) and meet all necessary requirements. Certificate no.: TUEV-COC-000515 Licence no.: FSC-C119815

Key figures

Formaldehyde emissions	< 3 µg/m ³
------------------------	-----------------------

Evidence

Indoor Air Comfort	Accomplished
Indoor Air Comfort Gold	Accomplished
AgBB	Accomplished
BREEAM International	Conform
LEED v4	Conform
DGNB	Conform